

**BakerSeries Roll-in Oven Racks -- Double Side-Load**

**LRR-2D-26-\_\_ Series**



**LRR-2D-26-20 Shown**

**Production Capacity Guide:**

	LRR-2D-26-10	LRR-2D-26-15	LRR-2D-26-20
<b>18 x 26 Sheet Pans</b>	20	30	40
<b>Pies (9 in dia)</b>	60	90	NA
<b>1# 5-Strap Bread</b>	150	NA	NA
<b>1 1/2# 5-Strap Bread</b>	150	NA	NA
<b>Cookies (Small)</b>	33 dozen	50 dozen	67 dozen

**Short Bid Specification:**

Roll-in Oven Rack shall be an **LBC Bakery Equipment, Inc. LRR-2D-26-\_\_** [Insert: 10,15 or 20] double-side load. Rack slides shall be constructed of 18 gage stainless steel, welded at each slide to a square tubular stainless steel frame and electro-polished to remove weld discoloration. Casters shall be of high temperature design, able to withstand up to 600 deg F and shall include a non-metallic, composite wheel with a Rulon type bearing insert. All fasteners shall be stainless steel. Oven racks shall be reinforced at the bottom frame to minimize rack sway when fully loaded. Racks shall be shipped KD and shall be assembled on site.

**Standard Product Warranty:** N/A

**Construction Features:**

- Designed for standard 18 x 26 sheet pans and five-on strap pans
- Heavy duty stainless steel construction
- Electro-polished annealed finish
- 4" high temperature, non-metallic swivel casters rated to 600 deg F
- Casters rated to 500 lbs each
- Rulon bearing inserts at wheel axles
- Fits standard "B" style lift systems
- Shipped knocked down for reduced freight class
- **Designed for Double Rack Ovens Only**

**BakerSeries Roll-in Oven Racks -- Double Side-Load**


**LRR-2D-26-\_\_ Series**

**Requirements:**

- **Racks are designed for Double Rack Ovens Only**
- Racks are shipped knocked down. Field assembly is required.
- Caster swivel bearings require periodic lubrication with #2 food-grade grease
- Rack spacing must allow 1-1/2" minimum clearance above finished food product

**Options -- check box(es) as required:**

- Factory pre-assembled rack
- Correctional Configuration: Fully welded rack -- including fasteners

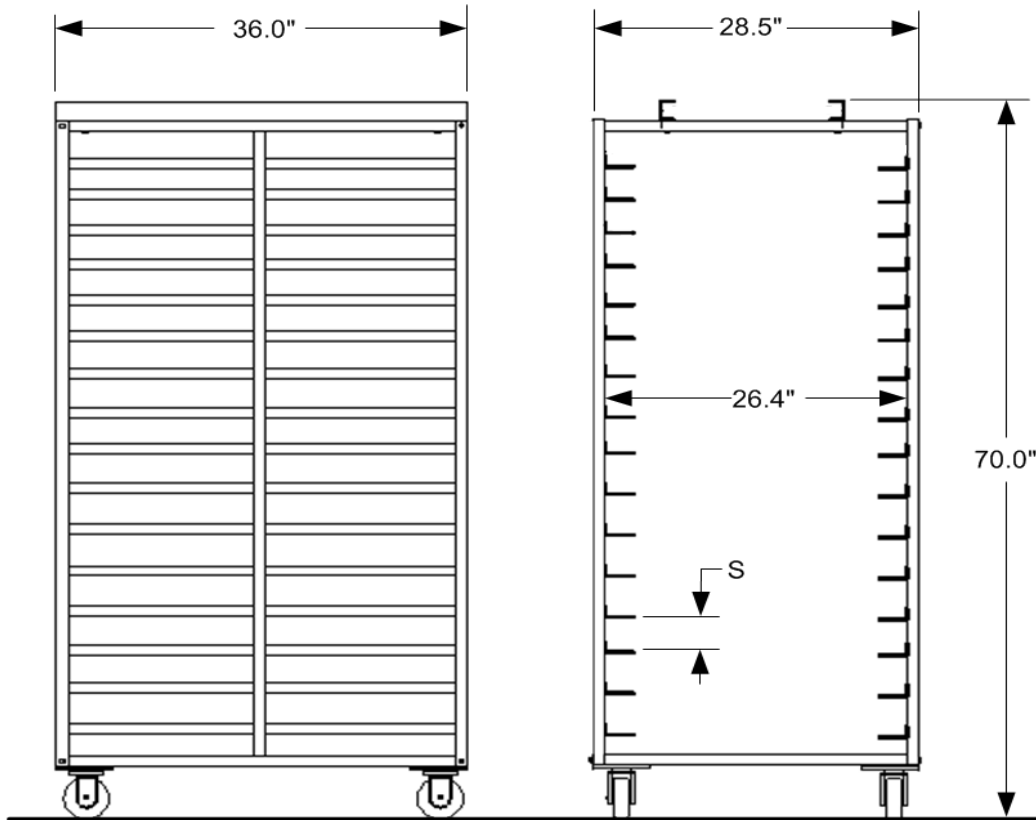

**Slide Spacing and Shipping Info:**

Model	Slide Spacing (S)	Shipping Weight	Freight Class
LRR-2D-26-10	6.0"	120 lbs	70
LRR-2D-26-15	4.0"	136 lbs	
LRR-2D-26-20	3.0"	157 lbs	